

Congratulations

on purchasing a Hills HideAway


Your Hills™ HideAway is designed to be the perfect companion to both LP Morgan™ and Grandview™ projection screens. Please pay special attention to the orientation that you select when installing the back box in your ceiling. The Hills HideAway is shipped in Grandview configuration as default.

Please read these instructions before beginning your installation.

BOX CUTOUT DIMENSIONS

Hills SVL code	Length A (mm)	Width B (mm)	Height C (mm)
HH1	Custom	Custom	Custom
HH2	2200	222	160
HH3	2560	222	160
HH4	2975	222	160
HH5	3360	300	250
HH6	3750	300	250
HH7	5000	300	250

Mounting bracket

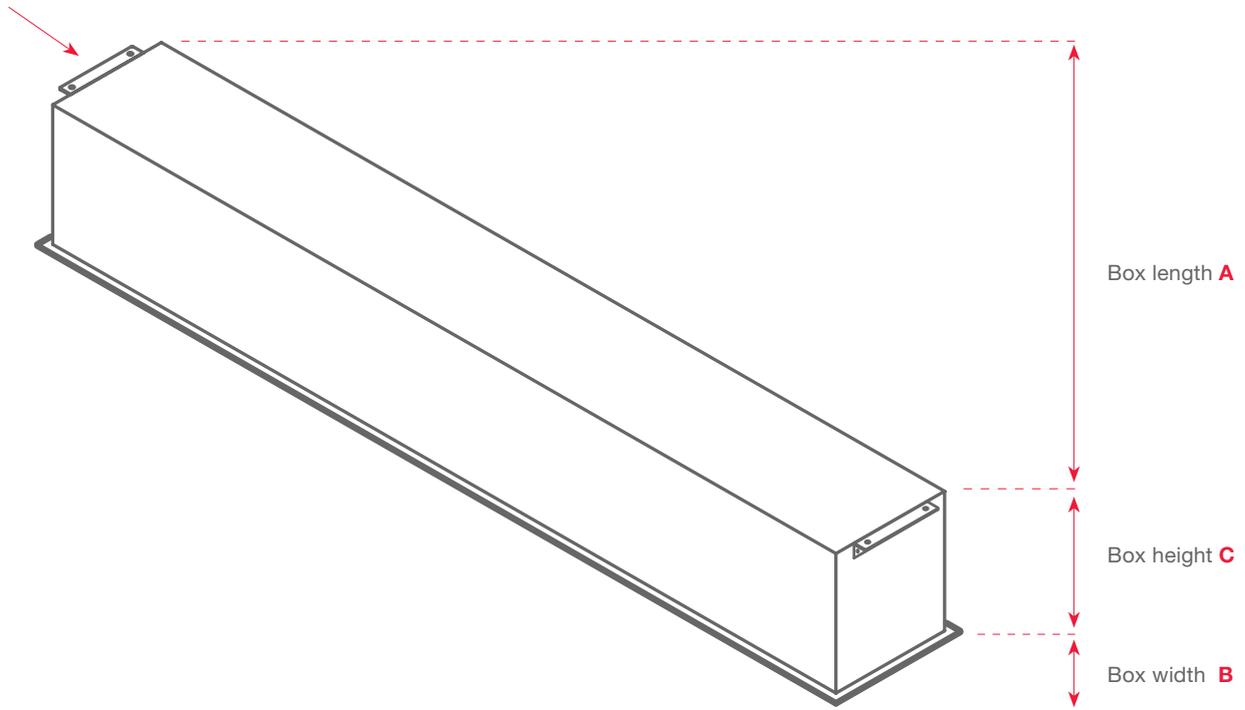

NSW

P: (02) 9647 1411
nsw@hillssvl.com.au

ACT

P: (02) 6228 1477
act@hillssvl.com.au

VIC

P: (03) 9890 7477
vic@hillssvl.com.au

QLD

P: (07) 3852 1312
qld@hillssvl.com.au

SA

P: (08) 8408 8300
sa@hillssvl.com.au

WA

P: (08) 9204 0200
wa@hillssvl.com.au

NZ

P: (09) 415 9426
nz@hillssvl.com.au

Installation instructions

Step 1


You will need a cutout in your ceiling -depending on the size of your HideAway (double check the size first!). Reference table on previous page.

Step 2

The mounting brackets for the HideAway box are secured at both ends for easy installation.

Step 3

Remove the Trim from the backing box and install the backing box with the correct orientation for your projection screen. Labels on the box will show the correct face to be forward once installed.

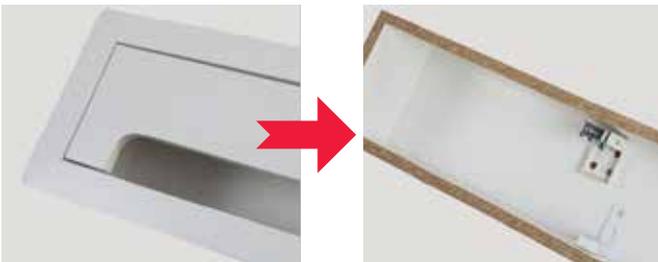

Step 4

When you have secured the HideAway back box in the ceiling, install the trim ensuring correct orientation is achieved (The opening in the trim should be farthest from the projector).



Step 5

Install your Grandview or LP Morgan projection screen onto the supplied brackets. Tighten the securing screws on the brackets in the case of Grandview screens. You are now ready to test your installation.

Step 6

Check the screen travels freely through the slot and doesn't catch. If out of alignment you may need to insert a spacer.

Step 7

Follow the instructions supplied with your screen for the correct wiring.

Step 8

Test that the screen operates correctly, and set the limits, if required. Follow the instructions supplied with your screen to do this.

Step 9

Screen should always retract to the Upper Limit set by the factory as the default position. The fabric should not be exposed when in the closed position as this will cause distortion of the screen over time.

Cable access

Grandview screens have the cable exit on the left hand side of the screen (from the viewing side) and LP Morgan screens on the right. If the Back Box is correctly oriented, the cable management penetration will be aligned with the cable exiting from your screen.

Maintenance

The Hills HideAway fascia can be cleaned with a soft cloth and mild detergent. There are no moving parts during normal operation, and the Hills HideAway carries a ONE year Warranty.

The Hills HideAway is a product of Hills SVL. Made in Australia. For more information, go to hillssvl.com.au



NSW

P: (02) 9647 1411
nsw@hillssvl.com.au

ACT

P: (02) 6228 1477
act@hillssvl.com.au

VIC

P: (03) 9890 7477
vic@hillssvl.com.au

QLD

P: (07) 3852 1312
qld@hillssvl.com.au

SA

P: (08) 8408 8300
sa@hillssvl.com.au

WA

P: (08) 9204 0200
wa@hillssvl.com.au

NZ

P: (09) 415 9426
nz@hillssvl.com.au

hillssvl.com.au